




PONTI SU RUOTE A TORRE / ALLUMINIO

ALUTOWER RI

ALUMINIUM
PROFESSIONAL
INTENSIVE USE

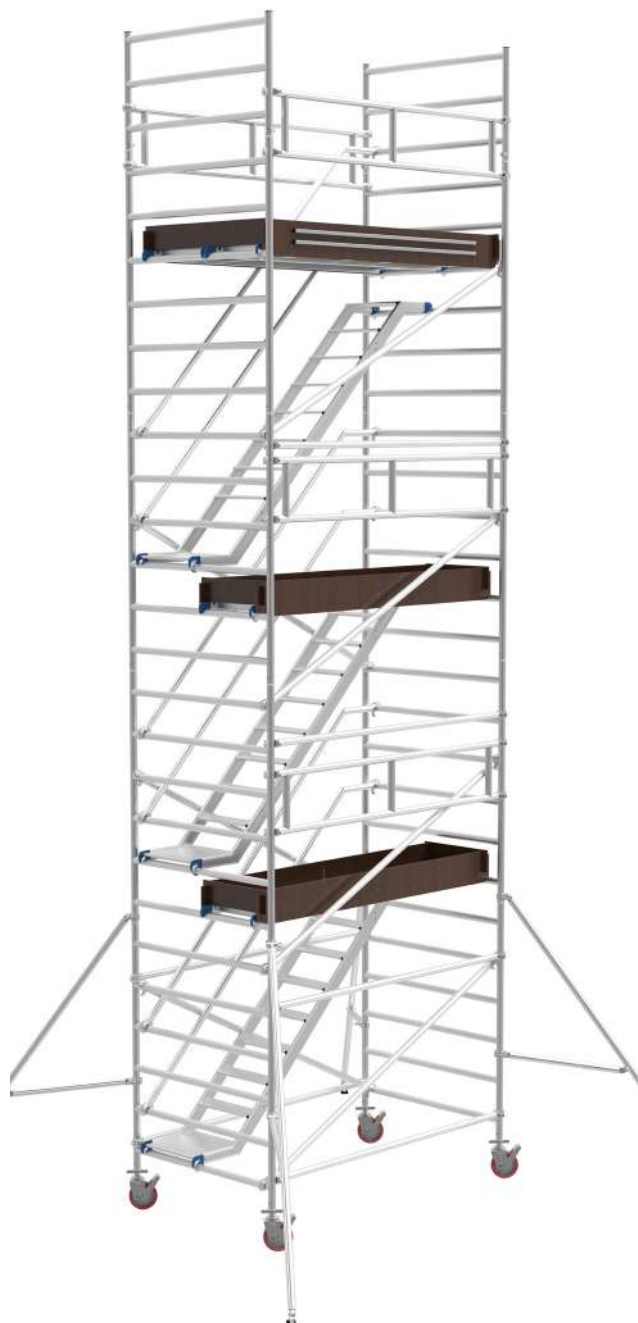

Professional Made using high quality aluminum Fast, easy to assemble and lightweight, with very few components. Tested and certified in accordance with EN 1004, use without anchoring to the wall and without ballast. It is made with aluminum tube, diameter 50 mm, extremely durable.



Intermediate work platform

CODE 50075

Kg 22 - Mc 0,10



Towers

CODE 50073


Kg 22 - Mc 0,18



Tower Ri-Ra

CODE 50074

Kg 14 - Mc 0,10



Telescopic Wheel cm 35

CODE 20824

Kg 6 - Mc 0,01



Configuration with alternating continuous ramp ladders



Tower dimensions


m 1,40 x 2,40

**Total load permitted**

Kg 501


**Round aluminium pipe**

Ø 50 mm

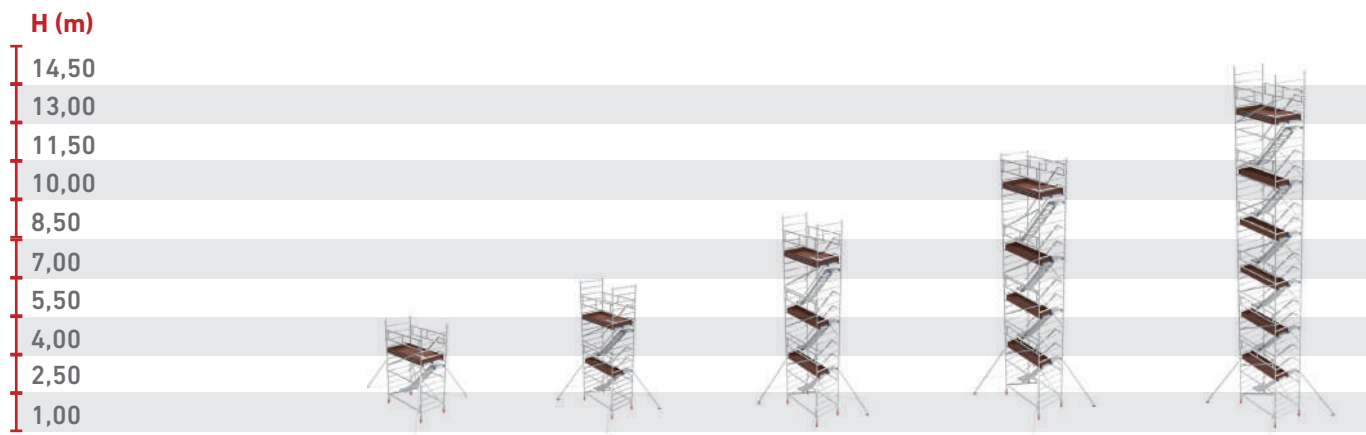EU
EN 1004-1D.Lgs.
81/2008
ART.140D.Lgs. 206/20
Art. 2
CONSUMATO**EN 1004-1 CLASSE "3"**
EN 1004-1 class "3"

CODE	AW.RI.EN.140.240.02	AW.RI.EN.140.240.03	AW.RI.EN.140.240.04	AW.RI.EN.140.240.05	AW.RI.EN.140.240.06
EN 1004-1:2021  €					

H max mobile tower	m	4,00	6,50	8,30	10,00	13,00
H max work platform	m	2,60	4,70	6,80	8,90	11,00
50057 Base	n.	1	1	1	1	1
50073 Tower / m 1,80	n.	0	1	2	3	5
50074 Tower RI/RA m 1,80	n.	1	1	1	1	1
50059 Final tower m 0,80	n.	0	1	1	1	0
50056 Internal ladder	n.	1	2	3	4	5
50076 Work Platform	n.	1	1	1	1	1
50075 Work Platform intermediate	n.	0	1	2	3	4
50052 Guardrail	n.	2	3	4	5	6
50054 4 Stabilizer	n.	1	1	1	1	1
Weight / Mc	kg/mc	184 / 1,8	276 / 2,00	350 / 2,20	424 / 2,50	508 / 3,10

OPTIONAL**Landing kit for access to roofs**
CODE 50120**Work platform with double trapdoor****CODE 50076**

Kg 22 - Mc 0,10

